

SINGLE/DOUBLE LEAF FIRE DOOR

60 MINUTE FIRE DOOR



The single-leaf Fire door for 60 minute fire rating door meets with Israeli and International fire regulations, providing outstanding protection and safety for various types of industries, facilities, storerooms and stairwells.

TECHNICAL SPECIFICATIONS

GENERAL DESCRIPTION

- Door leaf with two 0.8 mm thickness galvanized steel casings and interior reinforcements.
- Intumescent gasket between door and frame.
- Fire rated hardware.
- Telescopic bottom insert for final height adjustment.

HARDWARE AND ACCESSORIES

- Fire rated lock.
- Moveable lever door handles.
- Fixed handle – optional.
- Hydraulic closer - optional.

WINDOW DIMENSIONS (OPTIONAL)

- 600x400 mm.
- 820x170 mm.
- Round 440 mm diameter.

DOOR FINISH

- PVC finish.
- Powder coating.

DIMENSIONS

- Maximum door leaf height: 2470 mm.
- Maximum door leaf width: 1120 mm.
- Maximum frame dimensions: 2600X1200 mm.



DOOR FINISHES


RAL Color Catalog



PVC Coating



Window Options

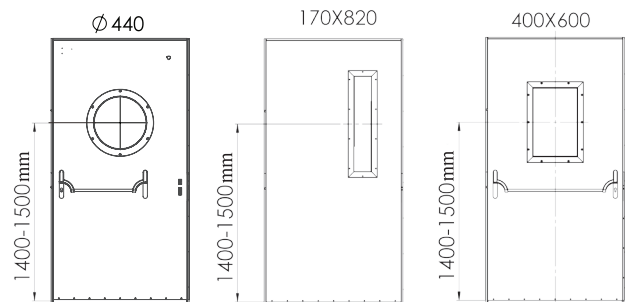

Additional door finishes available

* The colors are for illustration purposes only. The final color may vary.


For your assurance of maximum security and the highest quality, choose only original products by rb-doors.

www.rb-doors.com


SINGLE/DOUBLE LEAF FIRE DOOR | MODEL FWB

TECHNICAL DRAWINGS



PLASTIC HANDLE




AXIS





INSERT

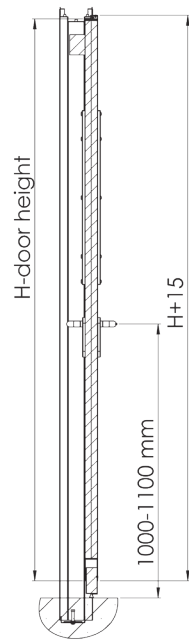

SECTION A-A

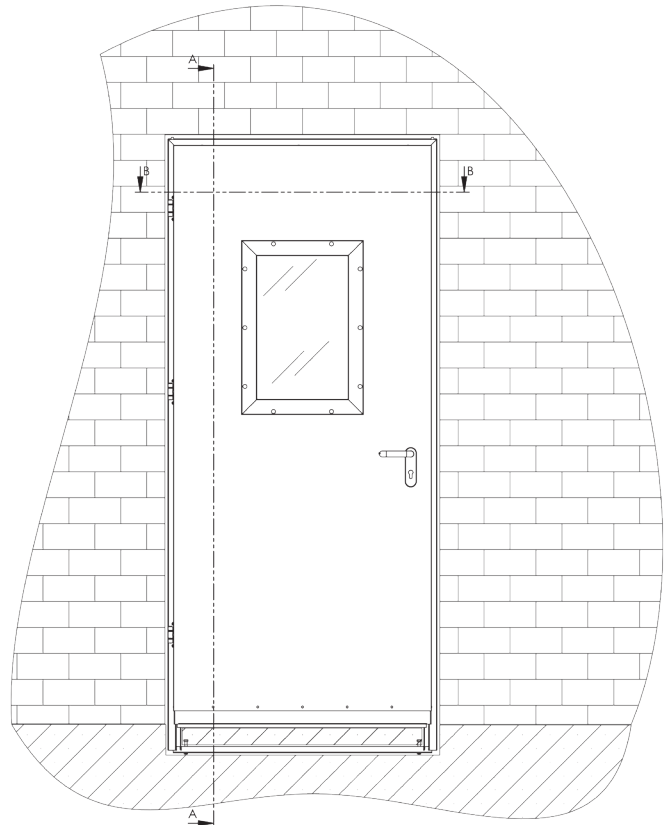

DETAIL C

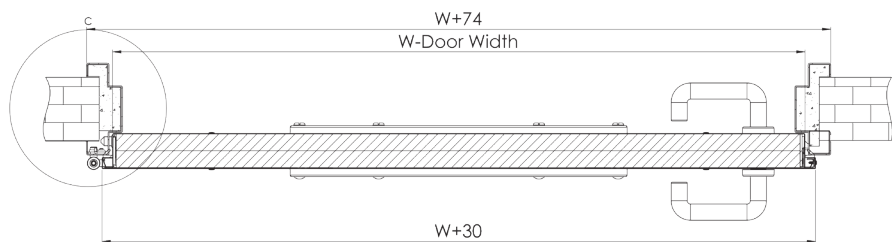

SECTION B-B



RB-DOORS

For your assurance of maximum security and the highest quality, choose only original products by rb-doors. RB-DOORS reserves the right to make changes and improvements to any products described in this document without prior notice.

www.rb-doors.com